



# SN-NVR10/02E3/008NSEP8 8CH 2HDDNVR with 8CH POE

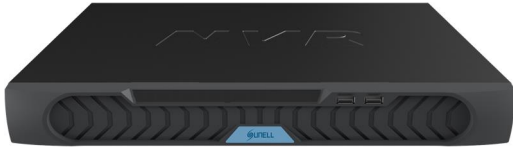

## Key features

- Up to 8ch 1080P IP cameras access
- Easy to use Same Interface of GUI/WEB/Client
- 2 SATA hard disk up to 4TB
- 1RJ45 10M/100M/1000M network interface
- 8ch POE Ports
- Simultaneous HDMI&VGA up to 1080P output
- 2 x 2.0 USB Host
- 2ch Alarm I/O ,
- 1ch Audio I/O
- Mini 1U

## Dimension



## Interface Introduction

1. POE Ports
2. RJ45 10M/100M/1000M Network interface
3. Reset
4. Audio I/O
5. VGA output
6. HDMI output
7. Alarm I/O
8. AC Power Supply

## Specifications

VIDEO/AUDIO INPUT	
Video Input	8ch 6MP/5MP/4MP/3MP/1080P/960P/720P/D1/VGA/CIF/QCIF
Incoming Bandwidth	80Mbps ,(main stream 64Mbps ,sub stream 16Mbps)
Outgoing Bandwidth	128Mbps
Audio Input	G711_A/G711_U
VIDEO/AUDIO OUTPUT	
Recording Resolution	6MP/5MP/4MP/3MP/1080P/960P/720P/D1/VGA/CIF/QCIF
Frame Rate	6MP/5MP/4MP/3MP@15fps; 1080P@25fps(PAL),30fps(NTSC);
Live View/Playback Resolution	6MP/5MP/4MP/3MP/1080P/960P/720P/D1/VGA/CIF/QCIF
Live View/Playback Capacity	Live View 8ch D1/4ch 1080P,1ch 6MP/5MP/4MP/3MP Playback4ch 1080P,1ch 6MP/5MP/4MP/3MP
HDMI/VGA Output	1920x1080/60Hz,1280x720/60Hz,1024x768/60Hz
Audio Output	1ch,Line out
HARD DISK	
SATA HDD	2SATA interface for 2HDD
Mounting Mode	Embedded
Capacity	Up to 4TB for each disk
NETWORK	
Network Interface	1 RJ45 10M/100M/1000M network interface
Protocol	RTP/RTCP,TCP/UDP,HTTP,DHCP,DNS,NTP
POE Interface	8ch 100Mbps ,IEEE802.3af
POE Max Power	120W
INTERFACE	
HDMI/VGA	1ch HDMI, 1ch VGA
USB	USB 2.0 x2
Audio I/O	1ch MIC in,1ch audio line out
Alarm I/O	2ch Alarm output, 2ch Alarm input
Reset Button	Yes
GENERAL	
Power Supply	AC110/220V Max input180W
Power Consumption	Max 10W(without HDD,USB,POE)
Operating Temperature	-10℃~+45℃
Operating Humidity	0% - 90% RH
Chassis	Mini 1U
Product Dimensions	372x311x44.5mm
Product Weight	<2.8kg